

EXCEL STEAM SEPARATOR



Palm Oil Mill Equipment Specialist

www.excelmech.com.my




STEAM SEPARATOR

MAIN FEATURES

Steam Separator is used to separate water droplets for steam from Boiler to Turbine in Palm Oil Mill.

SPECIFICATION

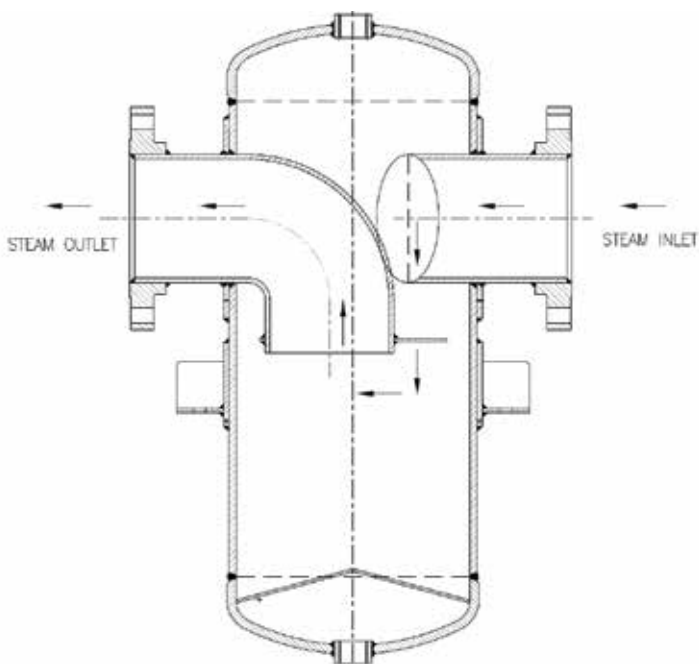

- Designed and fabricated to ASME Sect. VIII Div. 1
- DN150 to DN250 for inlet and outlet flanges.
- Boiler Plate SA.516 Gr.70 for shell and dished end.
- Working pressure: 20 to 42 Bar.
- All flanged nozzles to be provided with matching flanges, bolt and nuts.
- Design approval by D.O.S.H. / third party.

For further information, please contact sales office, or:



Excelmech Engineering Sdn. Bhd. (Company No. 862039-X)

Lot 2828, Jln Kelkati 32/168, Off Jln. Sri Gambut Bukit Naga,
Seksyen 32, 40460 Shah Alam, Selangor Darul Ehsan, Malaysia.
Tel: 603-5167 1589 Fax: 603-5167 2588
E-mail: contact@excelmech.com.my



SCAN ME