

EXCEL PRESSURE SAND FILTER



Palm Oil Mill Equipment Specialist

www.excelmech.com.my


PRESSURE SAND FILTER

MAIN FEATURES

Pressure Sand filters are used for water purification at water treatment plant in Palm Oil Mill and also for others industry.

SPECIFICATION

- Designed and fabricated to ASME code for Unfired Pressure Vessel.
- Mild Steel or Stainless Steel for shell and dished end.
- Complete with frontal piping and butterfly valves, filter nozzles, multi media sand and gravel.
- Internal surface to be sand blasted to SA2 ½ and painted with 2 coats Epoxy food grade paint.
- Working pressure: 350 kPa to 500 kPa.
- All flanged nozzles to be provided with matching flanges and bolt and nuts.
- Design drawing to be approved by D.O.S.H. Malaysia.
- Well design bottom distribution system c/w quality PP nozzles ensures uniform distribution flow of water through.

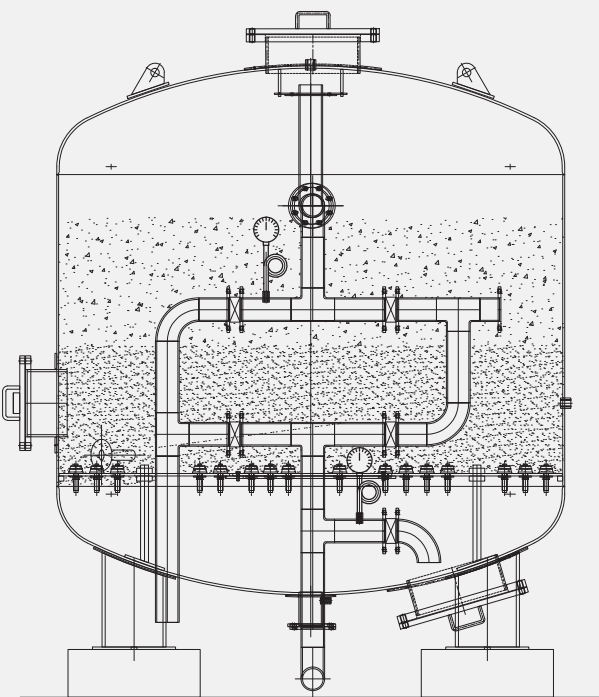

For further information, please contact sales office, or:



Palm Oil Mill Equipment Specialist

Excelmech Engineering Sdn. Bhd. (Company No. 862039-X)

Lot 2828, Jln Kelkati 32/168, Off Jln. Sri Gambut Bukit Naga,
Seksyen 32, 40460 Shah Alam, Selangor Darul Ehsan, Malaysia.

Tel: 603-5167 1589 Fax: 603-5167 2588

E-mail: contact@excelmech.com.my